



Electrical Specifications

Voltage: 115 VAC
Duty Cycle: Continuous
Resistance: 1533 ohms ± 10% (@ 20c)
Amps @ rated Volts: 0.05
Watts @ rated Volts: 6.0
Holding: 66 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp: -40c to 60c (range)


Additional Components

Screw: 10-32 x 1 1/4" Long (Hex Socket Head Cap) w/Nylok
Spring: N/A
Spiral Pin: N/A
Potting: United Resin Corp. (El-cast Black)
Finish: Housing - Zinc or Electroless Nickel Plating (0.0002-0.0003")

Center Post Recessed
(.003-.005)
Quick Release

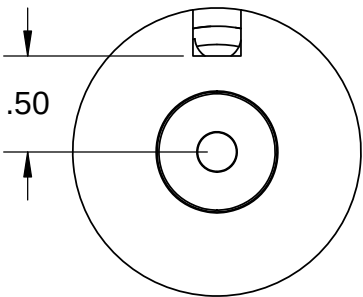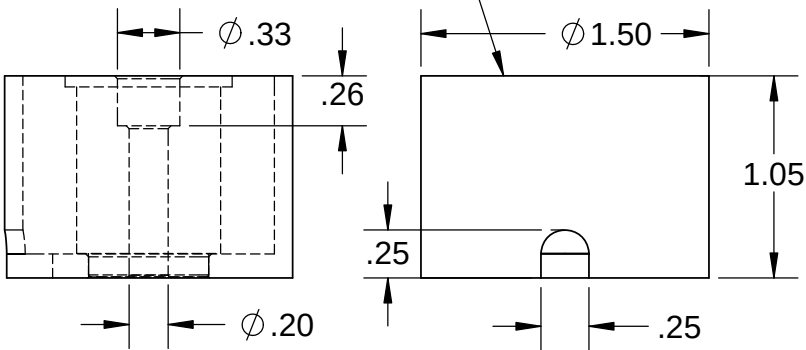

8" from coil to rectifier 11" after
22 Ga. Type 1015 UL

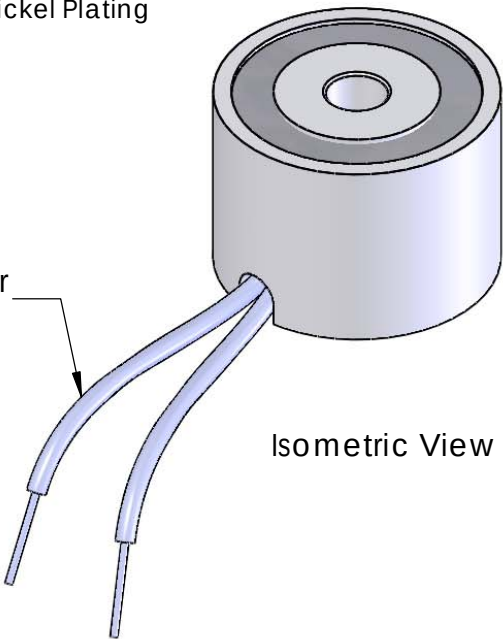

Isometric View

			UNLESS OTHERWISE SPECIFIED:		NAME	DATE	APW COMPANY		
			DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± .015 ANGULAR: MACH ± 2 BEND ± 2 TWO PLACE DECIMAL ± .005 THREE PLACE DECIMAL ± .003	DRAWN	K.H.	07.13.11	TITLE: P/N: EM150-115ac-112		
				CHECKED	J.K.	07.13.11			
				ENG APPR.	J.K.	07.13.11			
				MFG APPR.	J.K.	07.13.11			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APW COMPANY IS PROHIBITED.			INTERPRET GEOMETRIC TOLERANCING PER: ANSI	Q.A.					
			MATERIAL	COMMENTS:					
	NEXT ASSY	USED ON	FINISH						
	APPLICATION		DO NOT SCALE DRAWING						