



Electrical Specifications

Voltage: 24 VDC
Duty Cycle: Continuous
Resistance: 71 ohms ± 10% (@ 20c)
Amps @ rated Volts: 0.33
Watts @ rated Volts: 8.0
Holding: 110 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp: -40c to 60c (range)

Additional Components

Screw: N/A
Spring: N/A
Spiral Pin: N/A
Potting: N/A

Finish:
Housing - Zinc or Electroless Nickel Plating
(0.0002-0.0003")

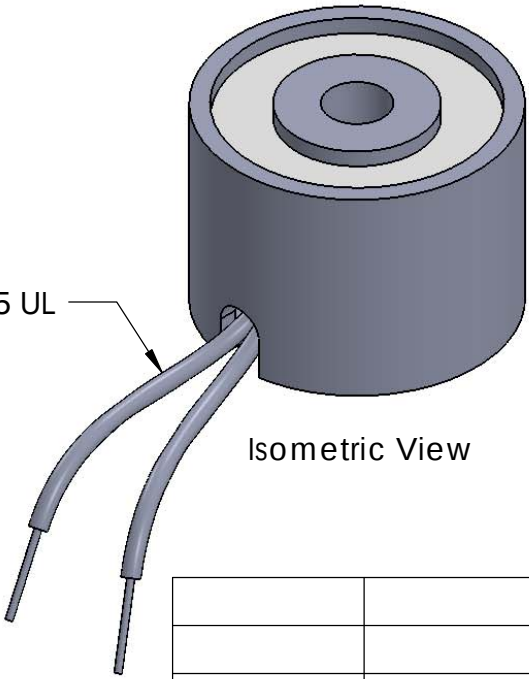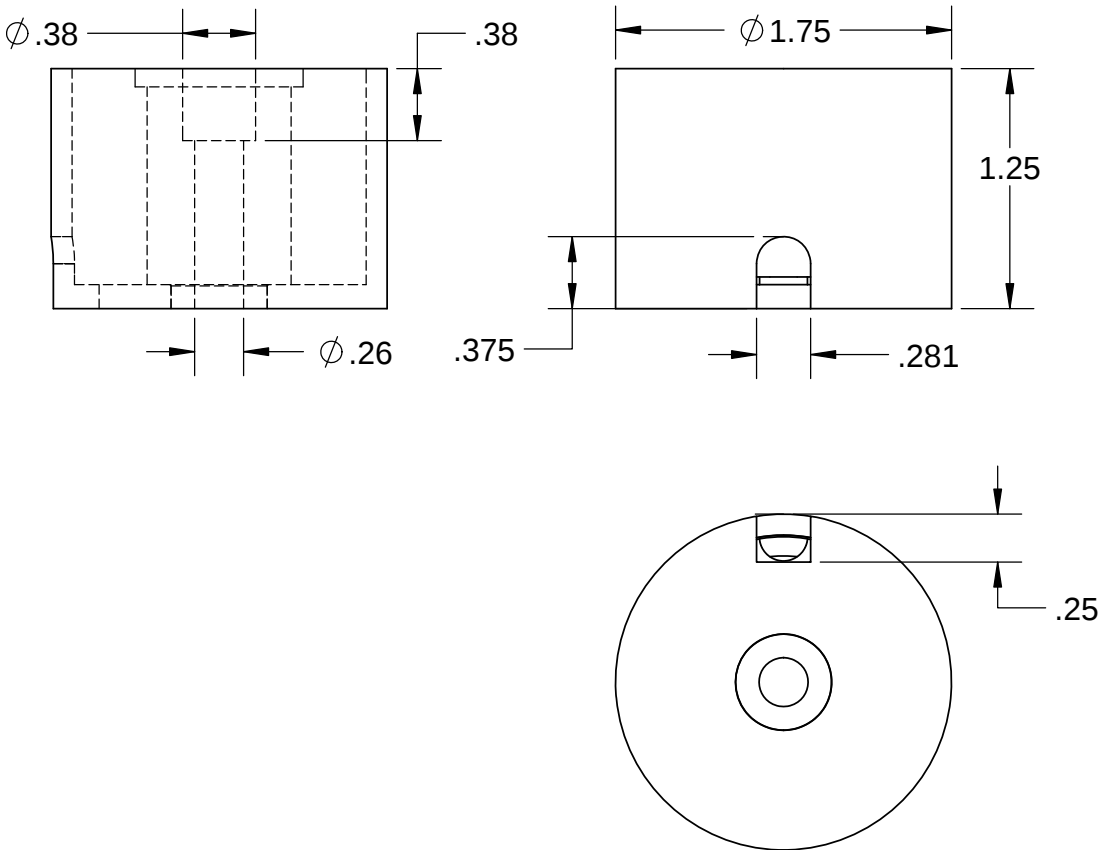

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
APW COMPANY. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF
APW COMPANY IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± .015 ANGULAR: MACH ± 2 BEND ± 2 TWO PLACE DECIMAL ± .005 THREE PLACE DECIMAL ± .003 INTERPRET GEOMETRIC TOLERANCING PER: ANSI MATERIAL FINISH		NAME	DATE
			DRAWN	K.H.	06.21.11
			CHECKED	J.K.	06.21.11
			ENG APPR.	J.K.	06.21.11
			MFG APPR.	J.K.	06.21.11
			Q.A.		
			COMMENTS:		
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			

APW COMPANY		
TITLE: P/N: EM175L-24-222		
SIZE A	DWG. NO. 5816	REV
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1