


Electrical Specifications

Voltage: 12 VDC
Duty Cycle: Continuous
Resistance: 18 ohms ± 10% (@ 20c)
Amps @ rated Volts: 0.67
Watts @ rated Volts: 8.0
Holding: 110 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp: -40c to 60c (range)

Additional Components

Screw: N/A
Spring: N/A
Spiral Pin: N/A
Potting: N/A

Finish:
Housing - Zinc or Electroless Nickel Plating
(0.0002-0.0003")

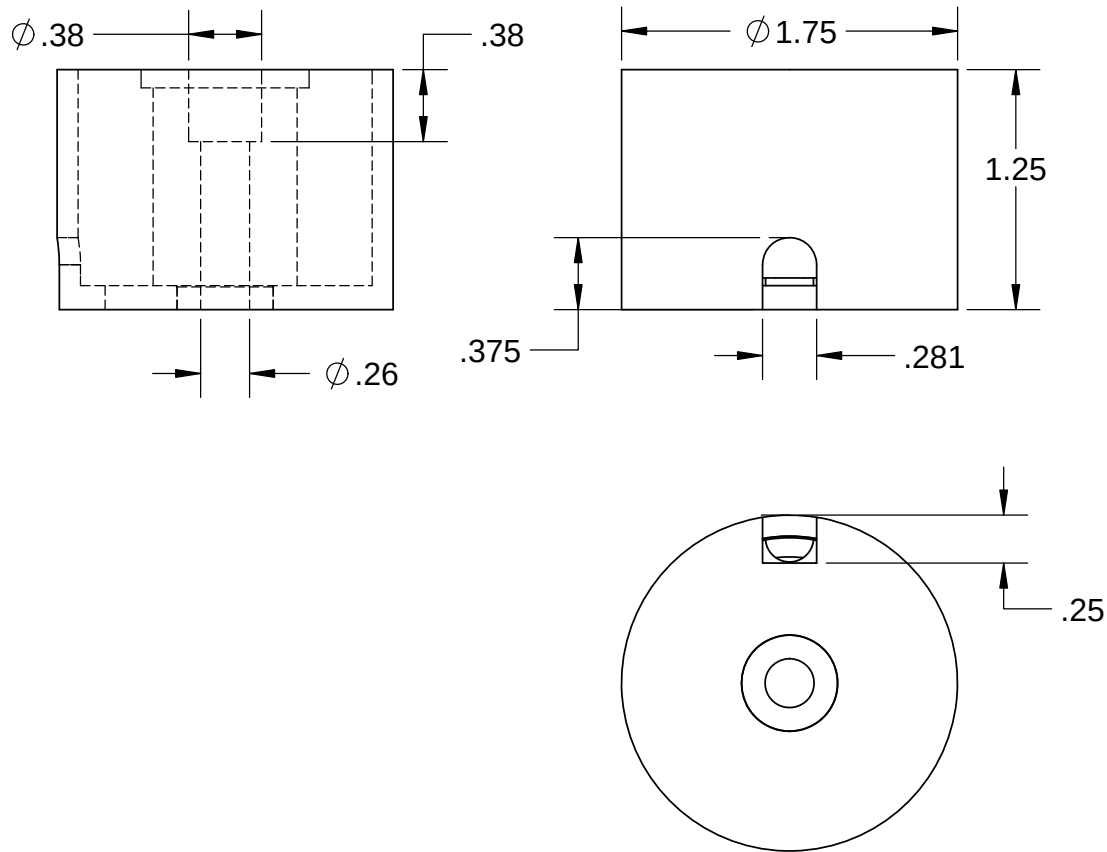

18" Long Leads
22 Ga. Type 1015 UL

Isometric View

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
APW COMPANY. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF
APW COMPANY IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	APW COMPANY	
		DIMENSIONS ARE IN INCHES		DRAWN	K.H.	06.21.11	TITLE: P/N: EM175L-12-222
		TOLERANCES:		CHECKED	J.K.	06.21.11	
		FRACTIONAL ± .015		ENG APPR.	J.K.	06.21.11	
		ANGULAR: MACH ± 2 BEND ± 2		MFG APPR.	J.K.	06.21.11	
		TWO PLACE DECIMAL ± .005		Q.A.			SIZE A
		THREE PLACE DECIMAL ± .003		COMMENTS:			
		INTERPRET GEOMETRIC TOLERANCING PER: ANSI					
		MATERIAL					DWG. NO. 5817
		FINISH					REV
NEXT ASSY		USED ON					
APPLICATION		DO NOT SCALE DRAWING					SCALE: 1:1
							WEIGHT:
							SHEET 1 OF 1