



Electrical Specifications

Voltage: 6 VDC
Duty Cycle: Continuous
Resistance: 4.75 ohms ± 10% (@ 20c)
Amps @ rated Volts: 1.33
Watts @ rated Volts: 8.0
Holding: 110 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp: -40c to 60c (range)

Additional Components

Screw: N/A
Spring: N/A
Spiral Pin: N/A
Potting: N/A

Finish: Housing - Zinc or Electroless Nickel Plating (0.0002-0.0003")

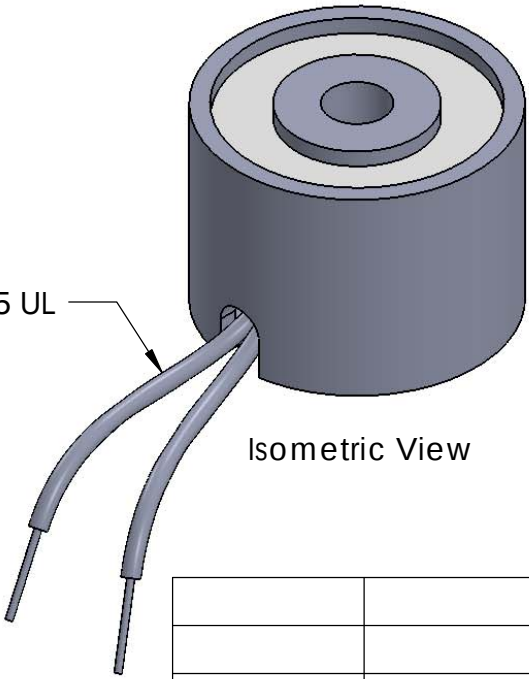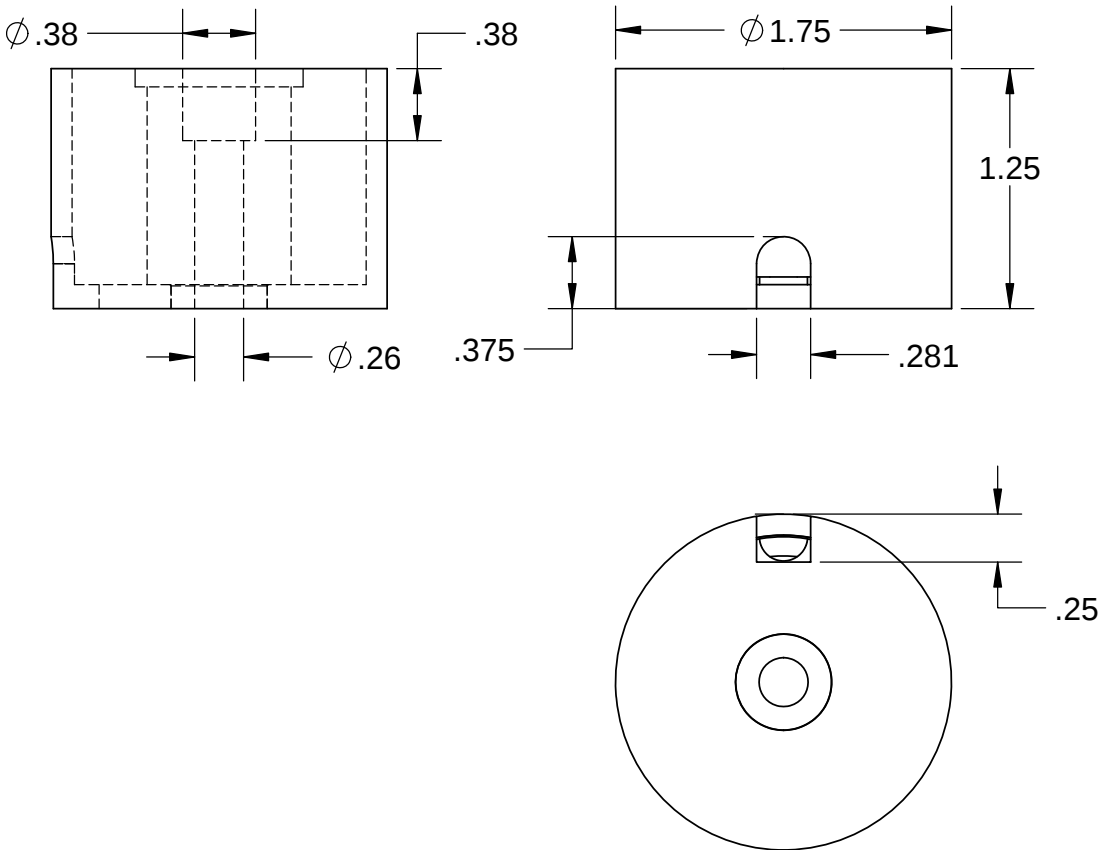

18" Long Leads
22 Ga. Type 1015 UL

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APW COMPANY IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES	DRAWN	K.H.	06.21.11
		TOLERANCES:	CHECKED	J.K.	06.21.11
		FRACTIONAL ± .015	ENG APPR.	J.K.	06.21.11
		ANGULAR: MACH ± 2 BEND ± 2	MFG APPR.	J.K.	06.21.11
		TWO PLACE DECIMAL ± .005			
		THREE PLACE DECIMAL ± .003			
		INTERPRET GEOMETRIC	Q.A.		
		TOLERANCING PER: ANSI	COMMENTS:		
		MATERIAL			
NEXT ASSY	USED ON	FINISH			
APPLICATION		DO NOT SCALE DRAWING			

APW COMPANY		
TITLE:		
P/N: EM175L-6-222		
SIZE	DWG. NO.	REV
A	5818	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1