

Electrical Specifications

Voltage: 24 VAC
Duty Cycle: Continuous
Resistance: 71 ohms ± 10% (@ 20c)
Amps @ rated Volts: 0.33
Watts @ rated Volts: 8.0
Holding: 83 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp: -40c to 60c (range)


Additional Components

Screw: N/A
Spring: N/A
Spiral Pin: N/A
Potting: N/A


Finish: Housing - Zinc or Electroless Nickel Plating
(0.0002-0.0003")

Center Post Recessed
(.003-.005)
Quick Release

8" from coil to rectifier 11" after
22 Ga. Type 1015 UL

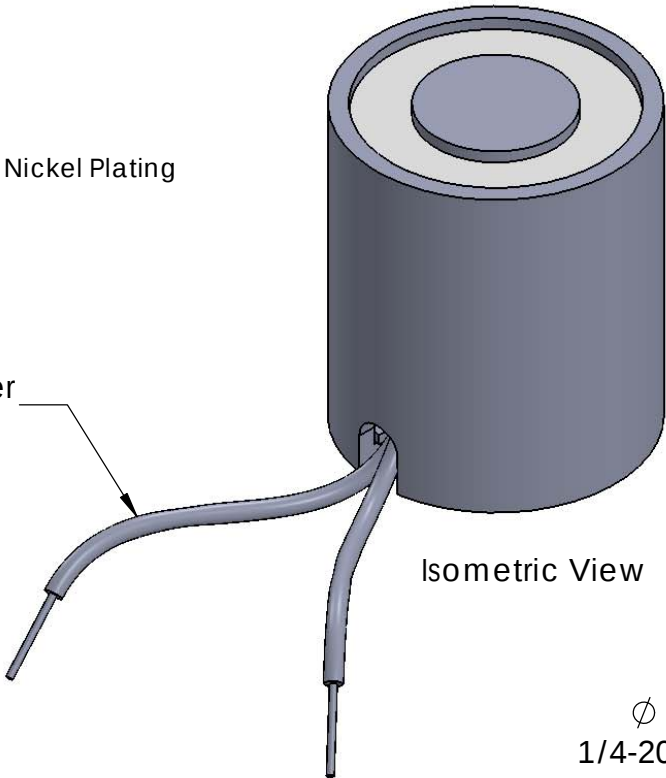

Isometric View

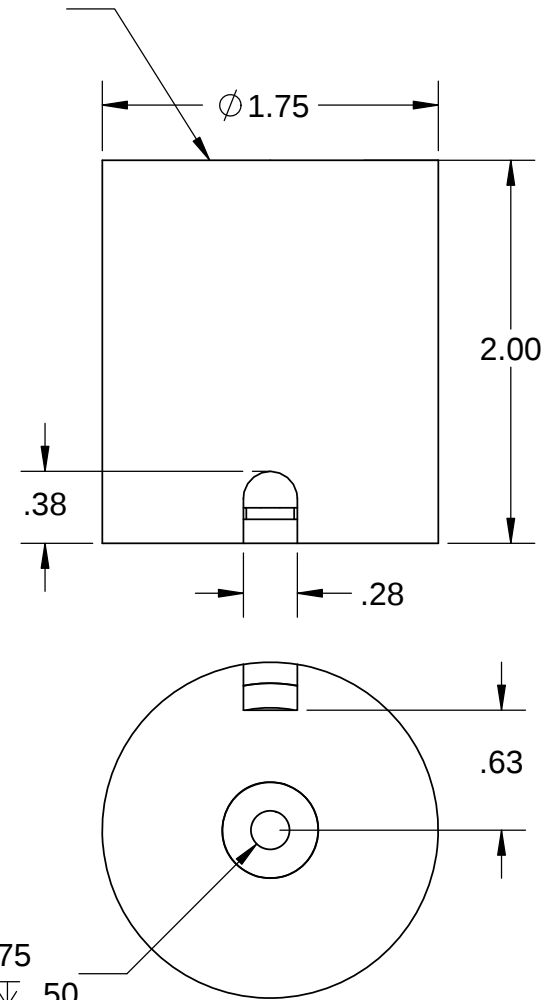

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
APW COMPANY. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF
APW COMPANY IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES	DRAWN	K.H.	08.01.11
		TOLERANCES:	CHECKED	J.K.	08.01.11
		FRACTIONAL ± .015	ENG APPR.	J.K.	08.01.11
		ANGULAR: MACH ± 2 BEND ± 2	MFG APPR.	J.K.	08.01.11
		TWO PLACE DECIMAL ± .005	Q.A.		
		THREE PLACE DECIMAL ± .003	COMMENTS:		
		INTERPRET GEOMETRIC			
		TOLERANCING PER: ANSI			
		MATERIAL			
NEXT ASSY	USED ON	FINISH			
APPLICATION		DO NOT SCALE DRAWING			

APW COMPANY

TITLE:
EM175L-24ac-122

SIZE A	DWG. NO. 5823	REV
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1