

Electrical Specifications

Voltage: 24 VDC
Duty Cycle: Continuous
Resistance: 71 ohms ± 10% (@ 20c)
Amps @ rated Volts: 0.33
Watts @ rated Volts: 8.0
Holding: 83 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp: -40c to 60c (range)


Additional Components

Screw: N/A
Spring: N/A
Spiral Pin: N/A
Potting: N/A


Finish: Housing - Zinc or Electroless Nickel Plating
(0.0002-0.0003")

Center Post Recessed
(.003-.005)
Quick Release

18" Long Leads
22 Ga. Type 1015 UL

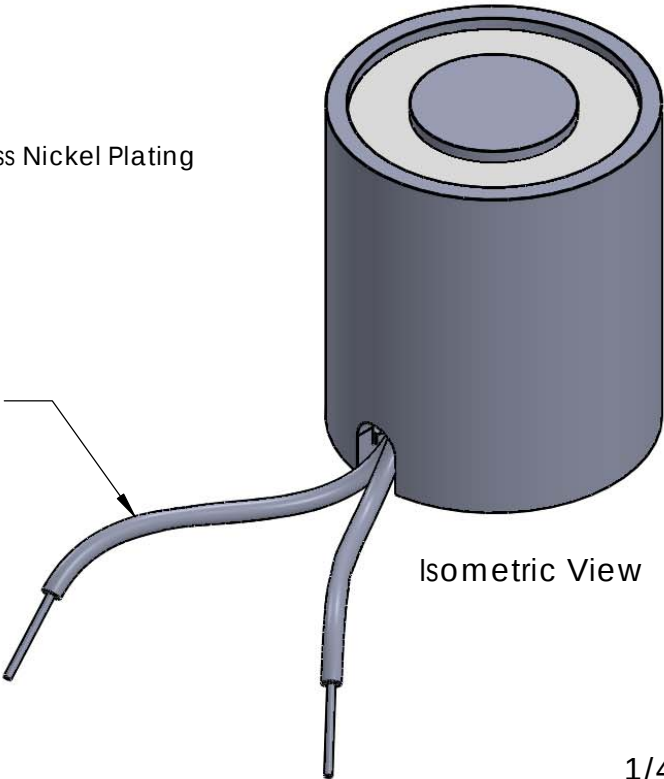

Isometric View

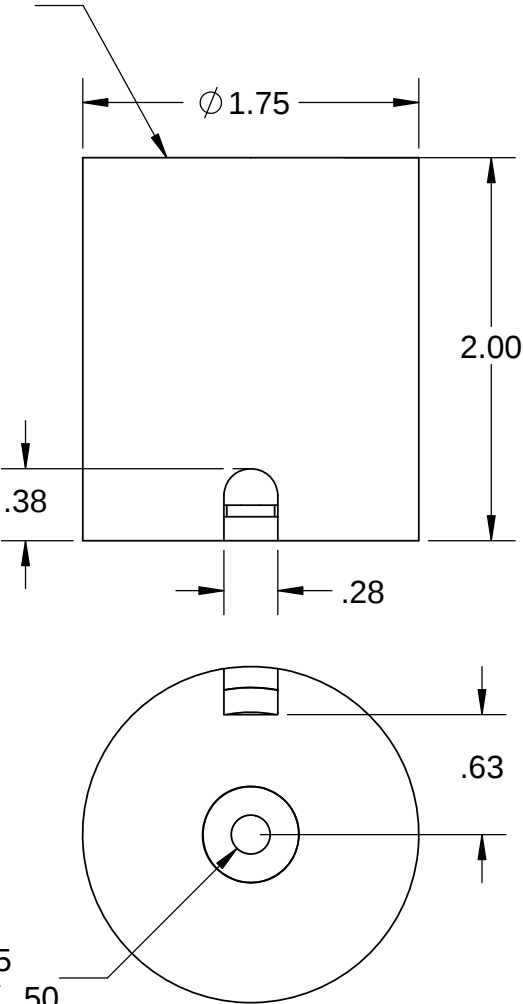

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
APW COMPANY. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF
APW COMPANY IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± .015 ANGULAR: MACH ± 2 BEND ± 2 TWO PLACE DECIMAL ± .005 THREE PLACE DECIMAL ± .003	DRAWN	K.H.	08.01.11
			CHECKED	J.K.	08.01.11
			ENG APPR.	J.K.	08.01.11
			MFG APPR.	J.K.	08.01.11
		INTERPRET GEOMETRIC TOLERANCING PER: ANSI	Q.A.		
		MATERIAL	COMMENTS:		
		FINISH			
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			

APW COMPANY

TITLE:
EM175L-24-122

SIZE A	DWG. NO. 5826	REV
------------------	-------------------------	-----

SCALE: 1:2	WEIGHT:	SHEET 1 OF 1
------------	---------	--------------