


## Electrical Specifications

**Voltage:** 220 VAC  
**Duty Cycle:** Continuous  
**Resistance:** 2150 ohms  $\pm$  10% (@ 20c)  
**Amps @ rated Volts:** 0.03  
**Watts @ rated Volts:** 7.0  
**Holding:** 105 lbs (1/4" Thick 1215 CRS @ 20c)  
**Operating Temp:** -40c to 60c (range)


## Additional Components

**Screw:** N/A  
**Spring:** N/A  
**Spiral Pin:** N/A  
**Potting:** United Resin Corp. (El-cast Black)  
**Finish:** Housing - Zinc or Electroless Nickel Plating (0.0002-0.0003")


Center Post Recessed  
(.003-.005)  
Quick Release

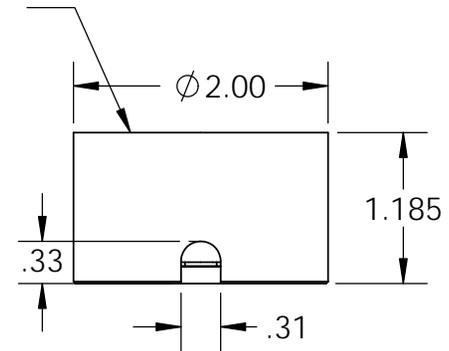

8" from coil to rectifier 11" after  
18 Ga. Type 1015 UL

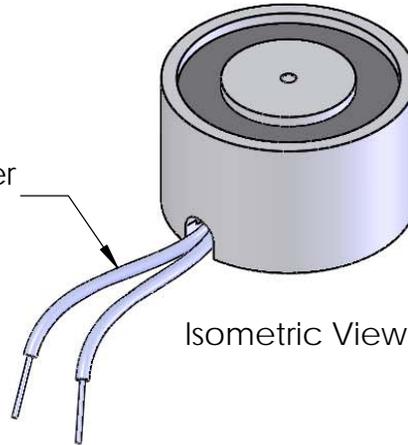

Isometric View

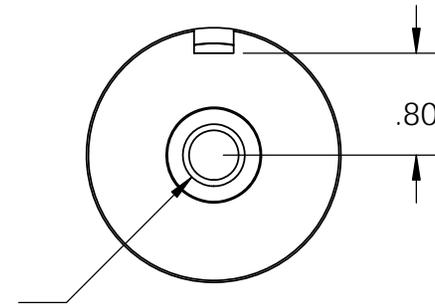

$\phi$  .39  $\nabla$  1.00  
 7/16-20 UNF  $\nabla$  .88  
 $\checkmark$   $\phi$  .49 X 45°, NEAR SIDE

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APW COMPANY IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	APW COMPANY	
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm$ .015 ANGULAR: MACH $\pm$ 2 BEND $\pm$ 2 TWO PLACE DECIMAL $\pm$ .005 THREE PLACE DECIMAL $\pm$ .003		DRAWN	K.H.	07.15.11	TITLE: P/N: EM200-220ac-112-A
				CHECKED	J.K.	07.15.11	
				ENG APPR.	J.K.	07.15.11	
				MFG APPR.	J.K.	07.15.11	
		INTERPRET GEOMETRIC TOLERANCING PER: ANSI		Q.A.			SIZE DWG. NO. REV <b>A</b> 5784
		MATERIAL		COMMENTS:			
	NEXT ASSY	USED ON	FINISH				
	APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:3 WEIGHT: SHEET 1 OF 1