

Electrical Specifications

Voltage: 6 VDC
Duty Cycle: Continuous
Resistance: 38 ohms \pm 10% (@ 20c)
Amps @ rated Volts: 0.17
Watts @ rated Volts: 1.0
Holding: 4.5 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp: -40c to 60c (range)


Additional Components

Screw: N/A
Spring: N/A
Spiral Pin: N/A
Potting: United Resin Corp. (El-cast Black)



Finish: Housing - Zinc or Electroless Nickel Plating
 (0.0002-0.0003")

18" Long Leads
 26 Ga. Teflon Type E

Isometric View

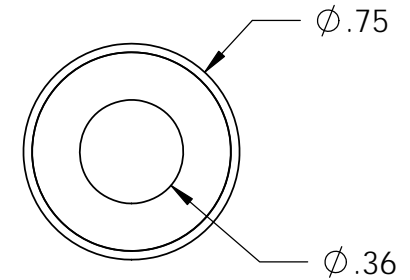

Center Post Recessed
 (.003-.005)
 Quick Release

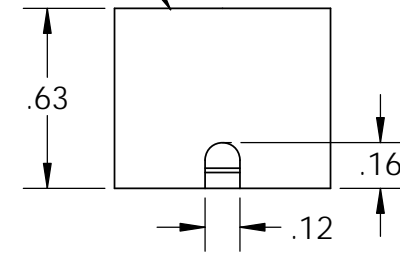

ϕ .11 ∇ .51
 6-32 UNC ∇ .35

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APW COMPANY IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL \pm .015 ANGULAR: MACH \pm 2 BEND \pm 2 TWO PLACE DECIMAL \pm .005 THREE PLACE DECIMAL \pm .003	DRAWN	K.H.	08.10.11
			CHECKED	J.K.	08.10.11
			ENG APPR.	J.K.	08.10.11
			MFG APPR.	J.K.	08.10.11
		INTERPRET GEOMETRIC TOLERANCING PER: ANSI	Q.A.		
		MATERIAL	COMMENTS:		
		FINISH			
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			

APW COMPANY

TITLE:

EM075-6-112

SIZE
A

DWG. NO.
5850

REV

SCALE: 3:2

WEIGHT:

SHEET 1 OF 1