

Electrical Specifications

115 VAC Voltage: Duty Cycle: Resistance: Continuous

1388 ohms ± 10% (@ 20c)

Amps @ rated Volts: 0.06 Watts @ rated Volts: 7.0

105 lbs (1/4" Thick 1215 CRS @ 20c) -40c to 60c (range) Holdina:


Operating Temp:

Additional Components

N/A Screw: Spring: N/A Spiral Pin: N/A Potting: N/A Rectifier: N/A

Housing - Zinc or Electroless Nickel Plating Finish:

(0.0002-0.0003")

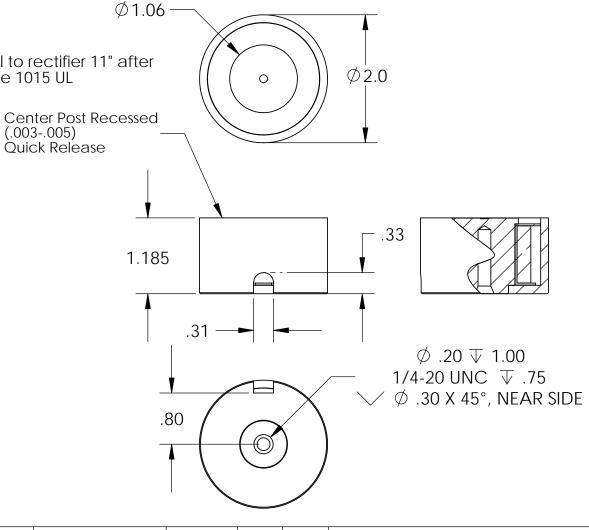

			UNLESS OTHERWISE SPECIFIED:		NAME	DATE	APW COMPANY			V
			DIMENSIONS ARE IN INCHES	DRAWN	K.H.	07.21.11				ĭ
			TOLERANCES: FRACTIONAL± .015	CHECKED	J.K.	07.21.1	TITLE:			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF			ANGULAR: MACH± 2 BEND ± 2 TWO PLACE DECIMAL ± .005 THREE PLACE DECIMAL ± .003 INTERPRET GEOMETRIC TOLERANCING PER: ANSI	ENG APPR.	J.K.	07.21.11)
				MFG APPR.	J.K.	07.21.11	P/N: E	P/N: EM200-115ac-122-		
	_			Q.A.			1			
				COMMENTS:						
			MATERIAL				SIZE DWG.	NO.		REV
							^	/170		
	NEXT ASSY	USED ON	FINISH				A	6172		
APW COMPANY IS PROHIBITED.	APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:3	WEIGHT:	SHEE	T 1 OF 1
4	7									

3