

Electrical Specifications

Voltage: Duty Cycle: 12 VDC Duty Cycle: Continuous
Resistance: 20.5 ohms ± 10% (@ 20c)
Amps @ rated Volts: 0.59
Watts @ rated Volts: 7.02

140 lbs (1/4" Thick 1215 CRS @ 20c) -40c to 60c (range) Holdina:


Operating Temp:

Additional Components

Screw: N/A N/A *Spring:* N/A *Spiral Pin:* N/A

Potting: United Resin Corp. (El-cast Black)

Housing - Zinc or Electroless Nickel Plating (0.0002-0.0003") Finish:

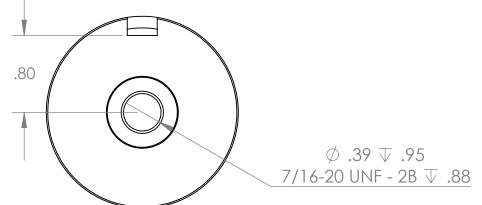

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APW COMPANY IS STRICLY PROHIBITED.	Client	Client P/N	UNLESS OTHERWISE SPECIFIED:		NAME	DATE	APW COMPANY				
			DIMENSIONS ARE IN INCHES	DRAWN	D.P.	01.16.24					
			TOLERANCES: FRACTIONAL ± .010	CHECKED			TITLE:				
			ANGULAR: MACH± BEND ± TWO PLACE DECIMAL ±.005 THREE PLACE DECIMAL ±.003	ENG APPR.			P/N: EM200-12-212-B				
				MFG APPR.							
			Break Sharp edges 0.002"	Q.A.							
			unles otherwise noted	COMMENTS:		1					
			MATERIAL				SIZE DWG	E DWG. NO.			
	NEXT ASSY	USED ON	FINISH	-			A	/036)		
	APPLICATION		DO NOT SCALE DRAWING				SCALE: 1:1	WEIGHT:	SHEE	T 1 OF 1	
<u></u>			2			0					

2